


Pentalift Pro Series Rotating Top

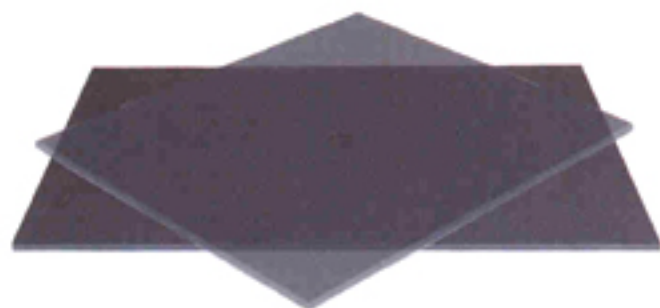

Ergonomic solution which smoothly and safely rotates the work to the worker. Ideal solution to eliminate reaching or unnecessary operator movements during palletizing, de-palletizing, work station assembly or manufacturing operations. Unlike other manufacturers' designs, Pentalift Pro Series Rotating Top Tables incorporate a countersunk central bolt to ensure the top platform cannot be accidentally lifted, removed or misaligned during load positioning or removal.

Note: Rotating top shown with guard ring removed to show roller details.

A heavy duty central thrust bearing and a minimum of four steel rollers each equipped with two sealed ball bearings ensure quiet and low effort operation.



Available Options (Not Shown)

- Manually operated platform rotation lock (metal shaft locks rotating top in 90° increments).
- Standard spring-activated detent stop (metal pin automatically engages every 90° to stop motion of rotating top).
- Deluxe detent stop with spring-loaded ball transfer in lieu of metal pin (available in 90° and 180° increments).

Note: Rotating top to be fastened to stable surface through four mounting holes supplied in the base plate.

Guidelines for selecting Pro Series Rotating Tops for Pro Series Lift Tables:

- Rotating tops can be installed on standard size Pro Series Lift Table platforms.
- Pro Series Rotating Tops shall be installed on Pentalift lift tables by Pentalift.
- All rotating tops designed to work with uniformly distributed loads (center of gravity of load within 10" of platform center).
- When specifying a rotating top for installation on a lift table, reduce the lift table capacity by 500 lb to account for the weight of the rotating top.

Pro Series Rotating Top Selection Chart

Model Number	Capacity (pounds)	Platform Size Width x Length	Base Size Width x Length	Shipping Weight (pounds)
RP3625	2500	36" x 36"	22" x 22"	210
RP3640	4000	36" x 36"	22" x 22"	235
RP3660	6000	36" x 36"	22" x 22"	260
RP4225	2500	42" x 42"	22" x 22"	285
RP4240	4000	42" x 42"	22" x 22"	310
RP4260	6000	42" x 42"	22" x 22"	335
RP4825	2500	48" x 48"	22" x 22"	360
RP4840	4000	48" x 48"	22" x 22"	385
RP4860	6000	48" x 48"	22" x 22"	410

Included in base units: 4" overall height, 360° dual-direction rotating top, thick steel platform, minimum of four load rollers equipped with two sealed ball bearings per roller to ensure quiet and low-effort operation. Center pivot consists of heavy-duty thrust roller bearing and countersunk bolt to hold top platform down, preventing accidental lifting and removal of platform during load positioning or removal. If these models and sizes do not fit your needs, contact a Pentalift sales representative for information about our application-designed equipment as highlighted on back page.